

WX3100-T0

Dual-Band Wireless AX1800 Gigabit Extender



Quick Start Guide Kratka navodila

ENGLISH | SLOVENSKO

Package Contents / Vsebina paketa



Device
Naprava



Power Adapter
Napajalni adapter



Ethernet Cable
Ethernet kabel



Quick Start Guide
Navodila za hitri zagon



Declaration of Conformity
Safety Warnings
Izjava o skladnosti
Varnostna opozorila


Additional Information / Dodatne informacije

EU Importer

Zyxel Communications A/S
Gladsaxevej 378, 2. th. 2860 Søborg, Denmark.
<https://www.zyxel.com/dk/da/>

Copyright © 2021 Zyxel Communications Corp. All Rights Reserved.


Setting Up the WX3100 | Nastavitev WX3100

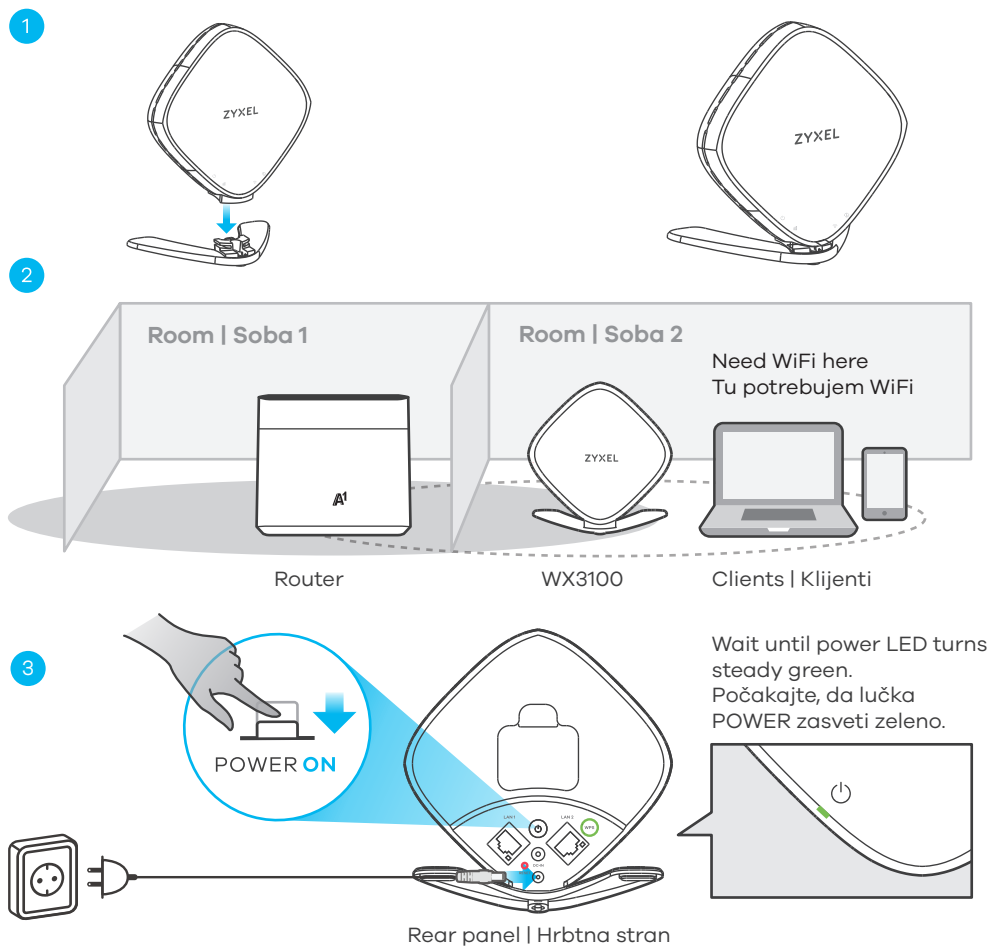

For more information please scan the QR code.
Za več informacij skenirajte QR kodo.



Network Scenario 1: With MPro Mesh Router | Network Scenarij 1: Z MPro Mesh Router

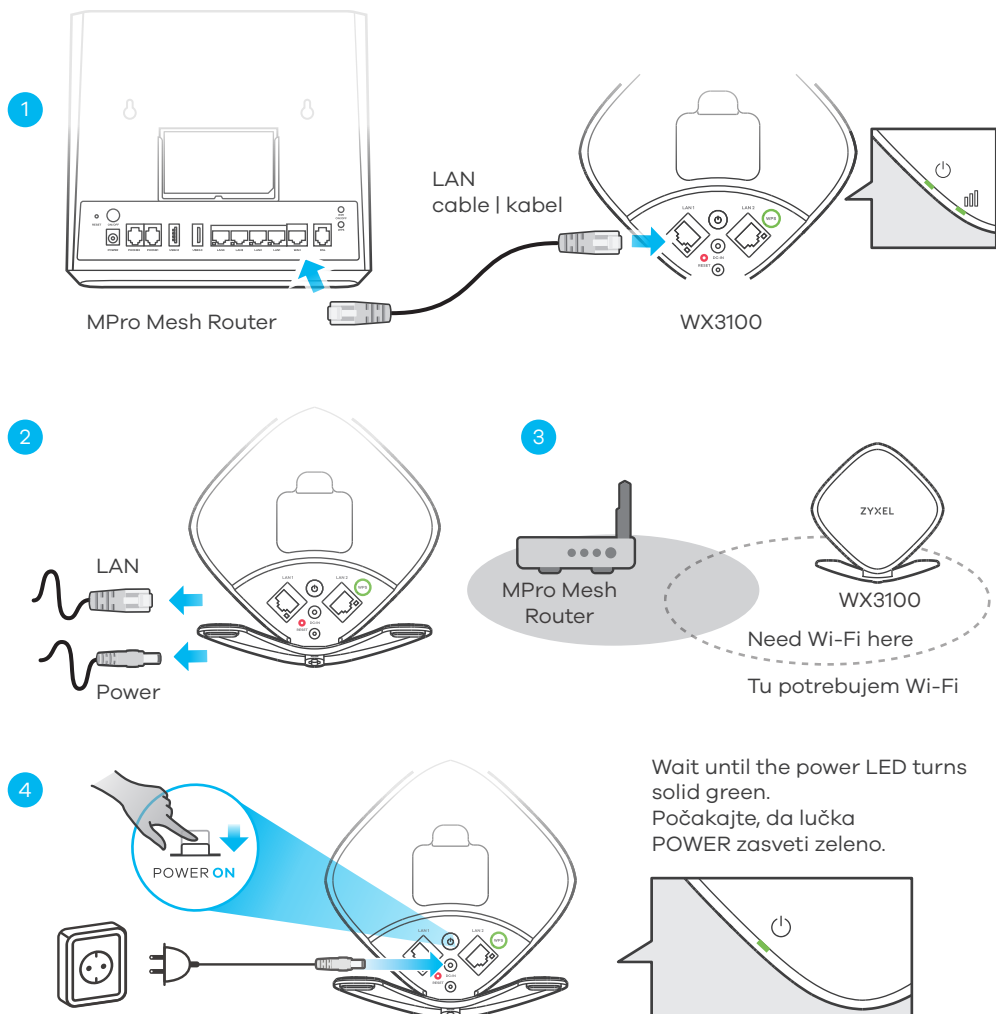

EN In this scenario, you have a Zyxel router that supports MPro Mesh. If you do not, go to **Network Scenario 2**.

Note: To check if your Zyxel router supports MPro Mesh, see the MPro Mesh solution page on the Zyxel website.

Note: To set up your **WX3100** with the MPro Mesh app, scan the QR code in the last page.

SI V tem primeru imate usmerjevalnik Zyxel, ki podpira MPro Mesh. Če ga nimate, pojdite na **2. omrežni scenarij**.


Opomba: Če želite preveriti, ali vaš usmerjevalnik Zyxel podpira MPro Mesh, obiščite stran Rešitve MPro Mesh na spletnem mestu Zyxel.

Opomba: Če želite svoj **WX3100** nastaviti z aplikacijo MPro Mesh, skenirajte kodo QR na zadnji strani.

	<p>Green On - Power is on or the MPro Mesh configuration process is done. Blinking - The WX3100 is starting up or under the MPro Mesh configuration process.</p> <p>Red On - The WX3100 detects a system error. Blinking (Fast) - The WX3100 is upgrading firmware. Blinking (Slow) - The Easy Mesh process has failed.</p>
	<p>With Wireless Connection</p> <p>Green On - 2.4G/5G WiFi is ready.</p> <p>Amber On - The signal is too strong. We suggest moving the WX3100 away from the MPro Mesh Router.</p> <p>Red On - The signal is too weak. Move the WX3100 closer to the MPro Mesh Router.</p> <p>With Wired Connection</p> <p>Green On - The Ethernet cable is connected to the WX3100 LAN port.</p>
	<p>Green On - The WiFi connection to the MPro Mesh router is good. Blinking - The WX3100 is transmitting/receiving WiFi data.</p> <p>Off - 2.4G/5G WiFi is disabled.</p>
	<p>Amber Blinking - The WPS is in process. Off - The WPS process is done.</p>

	<p>Zelena Sveti - Napajanje je vklopljeno ali pa je končan postopek konfiguracije MPro Mesh.</p> <p>Utripa - WX3100 se zaganja ali je v postopku konfiguracije MPro Mesh.</p> <p>Rdeča Sveti - WX3100 zazna sistemsko napako.</p> <p>Utripa (hitro) - WX3100 nadgrajuje vgrajeno programsko opremo.</p> <p>Utripa (počasi) - Postopek Easy Mesh ni uspel.</p>
	<p>Z brezžično povezavo</p> <p>Zelena Sveti - 2,4G/5G WiFi je pripravljen.</p> <p>Oranžna Sveti - Signal je premočan. Predlagamo, da WX3100 premaknete stran od MPro Mesh Routerja.</p> <p>Rdeča Sveti - Signal je prešibak. Premaknite WX3100 bližje MPro Mesh Routerju.</p> <p>Z žično povezavo</p> <p>Zelena Sveti - Ethernetni kabel je priključen na vrata LAN WX3100.</p>
	<p>Zelena Sveti - WiFi povezava z usmerjevalnikom MPro Mesh je dobra.</p> <p>Utripa Ne sveti - WX3100 oddaja/sprejema podatke WiFi. 2.4G/5G WiFi je onemogočen.</p>
	<p>Oranžna Utripa - WPS je v postopku.</p> <p>Ne sveti - Postopek WPS je končan.</p>

Network Scenario 2: Non-MPro Mesh Router and Two WX3100s | Omrežni scenarij 2: mrežni usmerjevalnik brez MPro in dva WX3100

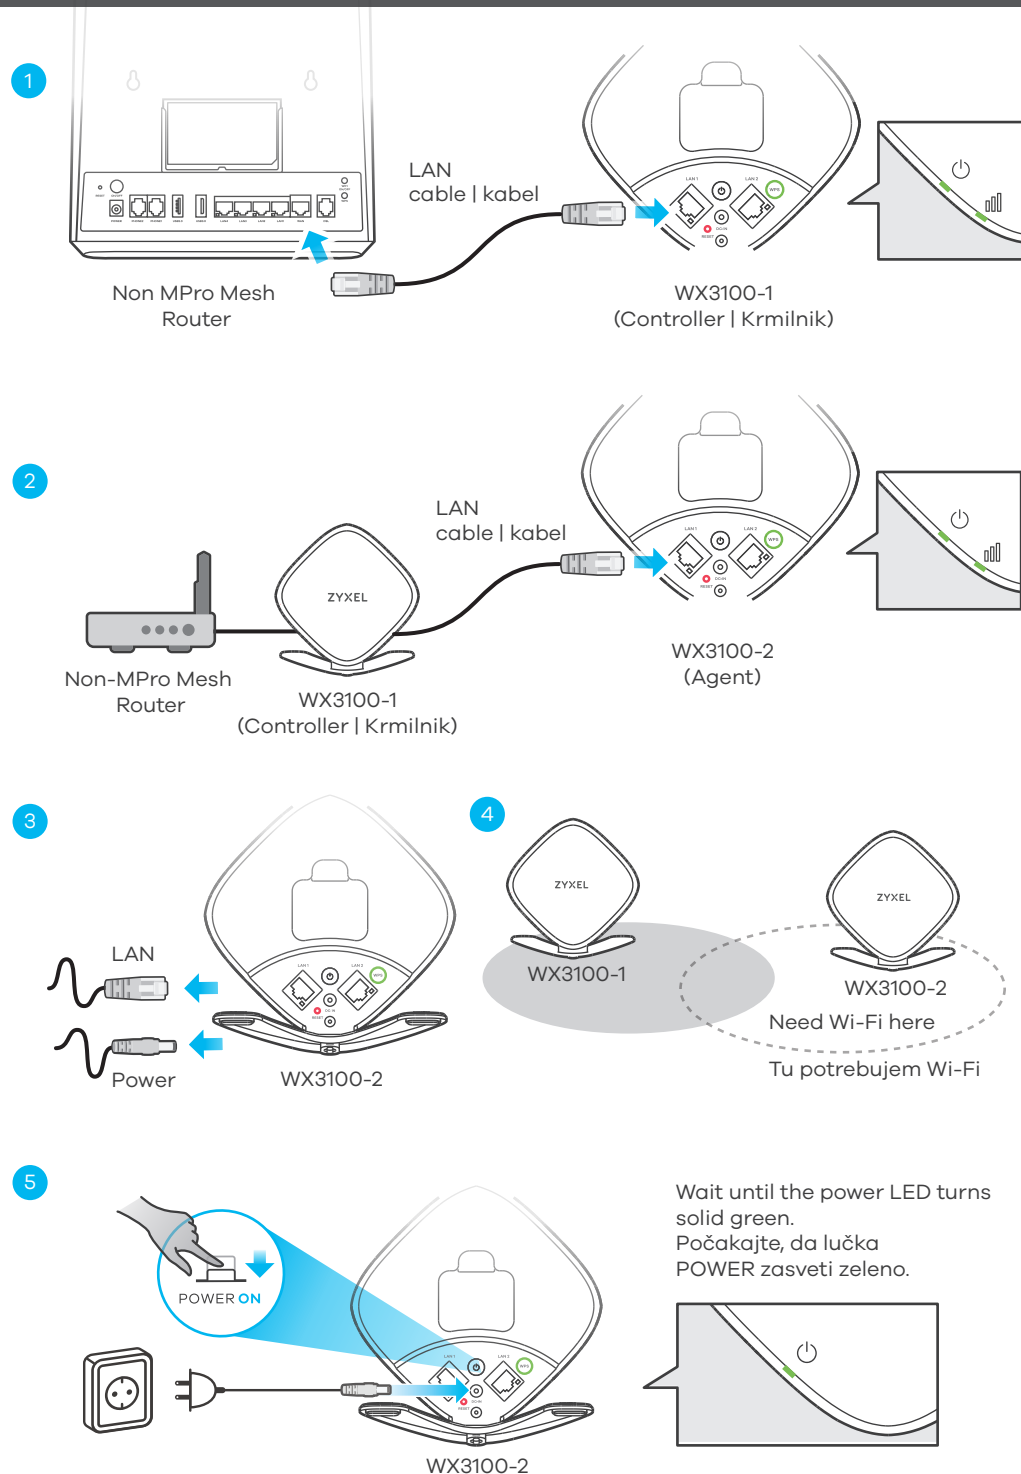

- EN**
- Use the included Ethernet cable to connect the first **WX3100 (WX3100-1)** LAN port to the Non-MPro Mesh Router LAN port. Wait until the **POWER** and **LINK** LEDs are solid green.
 - Use another Ethernet cable to connect the second **WX3100 (WX3100-2)** LAN port to the first **WX3100-1** LAN port. Wait until the **POWER** and **LINK** LEDs on **WX3100-2** are solid green.
 - Unplug the Ethernet and power cable from the **WX3100-2**.
 - Place the **WX3100-2** where you want to extend your wireless network.
 - Plug in the power adapter. Make sure your **LINK** LED is steady green (preferred) or amber. For more details on the LEDs, please refer to the LED table.
- To add more extenders to your network, repeat from step 2.
- Note:** In this scenario, do not unplug the Ethernet cable connecting the **WX3100-1** and Non-MPro Mesh Router.

- SI**
- S priloženim ethernetnim kablom povežite prva vrata LAN **WX3100 (WX3100-1)** z vrati LAN mrežnega usmerjevalnika, ki niso MPro. Počakajte, da lučki LED **POWER** in **LINK** zasvetita zeleno.
 - Z drugim ethernetnim kablom povežite druga vrata LAN **WX3100 (WX3100-2)** s prvimi vrati LAN **WX3100 (WX3100-1)**. Počakajte, da lučki LED **POWER** in **LINK** na **WX3100-2** zasvetita zeleno.
 - Odklopite ethernetni in napajalni kabel iz **WX3100-2**.
 - Postavite **WX3100-2** na mesto, kamor želite razširiti brezžično omrežje.
 - Priključite napajalnik. Prepričajte se, da lučka LED **LINK** sveti zeleno (priporočljivo) ali oranžno. Za več podrobnosti o LED diodah si oglejte tabelo LED.
- Če želite svojemu omrežju dodati več razširitev, ponovite od 2. koraka dalje.
- Opomba:** V tem primeru ne smete izključiti ethernetnega kabla, ki povezuje **WX3100-1** in mrežni usmerjevalnik brez MPro.

Managing Your WX3100 using the MPro Mesh App | Upravljanje vašega WX3100 z aplikacijo MPro Mesh

Available on the iPhone

GET IT ON Google Play

- EN** Download the **MPro Mesh app** to manage your **WX3100**.
Note: To manage your Mesh network, connect the MPro Mesh app to the Controller (MPro Mesh Router in Scenario 1 or WX3100-1 in Scenario 2).
- SI** **Prenesite aplikacijo MPro Mesh za upravljanje vašega WX3100.**
Opomba: Če želite upravljati svoje Mesh omrežje, povežite aplikacijo MPro Mesh s krmilnikom (MPro Mesh Router v 1. scenariju ali WX3100-1 v 2. scenariju).



Scan this QR code to see steps for setting up your WX3100 with the MPro Mesh app.

Skenirajte to kodo QR in si oglejte korake za nastavitev vašega WX3100 z aplikacijo MPro Mesh.